

# TRAIL-15 HD

## TECHNICAL DATA SHEET



SCHOOLS



SPORTS FACILITIES



CROSSFIT



MODERATE WEIGHTS

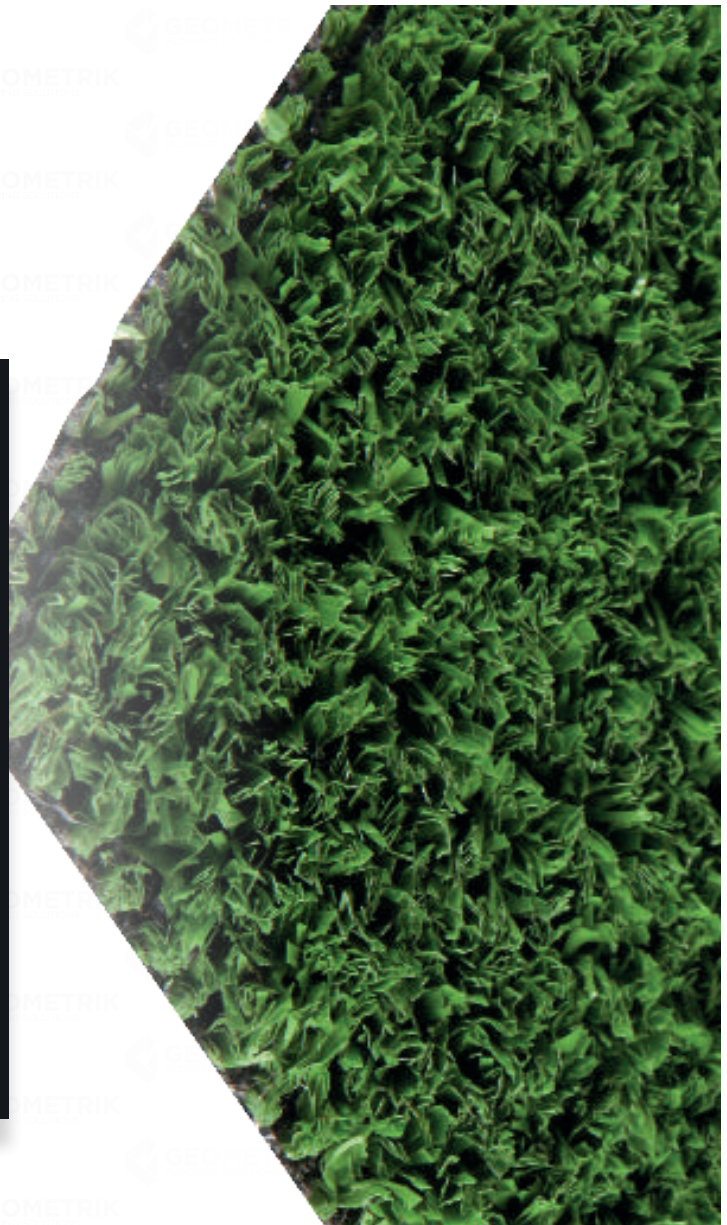


SLED DRILL



FUNCTIONAL TRAINING

### OTHER APPLICATIONS

 COMMERCIAL AREAS - EXHIBITIONS -  
 COMMON SPACES - RELAX - GROUP ACTIVITIES


### FINISHING






Trail-15 HD

### DIMENSIONS AND TOLERANCES

<b>Thickness (mm)</b>	15mm			
<b>Length - Roll (m)</b>	5m	10m	15m	20m
<b>Width - Roll (m)</b>	2m	2m	2m	2m
<b>Tolerances</b>	Length & Width $\pm$ 1,5%   Thickness $\pm$ 5%			

## COMPOSITION

<b>Yarn Type</b>	6600 dTex. 100% PE with UV stabilization (+/-5%)T		
<b>Gauge</b>	3/16"		
<b>Yarn Weight</b>	15mm (+/-5%)		
<b>Stitch rate</b>	216s/m (45.360/m <sup>2</sup> ) (+/-10%)		
<b>Primary Backing</b>	100% Polypropylene fabric		
<b>Secondary Backing</b>	Styrene Butadiene Rubber (SBR)		
<b>Fire Behaviour</b>	Efl	EN 13501	
<b>Colors</b>	 Green	 Red Tile	 Blue
<b>Infill Material</b>	Sand (Rounded silica)		

\*Its composition and appearance can change while maintaining its behavior and performance.