

GEOMETRIK

VERSION 1 - 18/11/2026

CurledLadder

TECHNICAL DATA SHEET

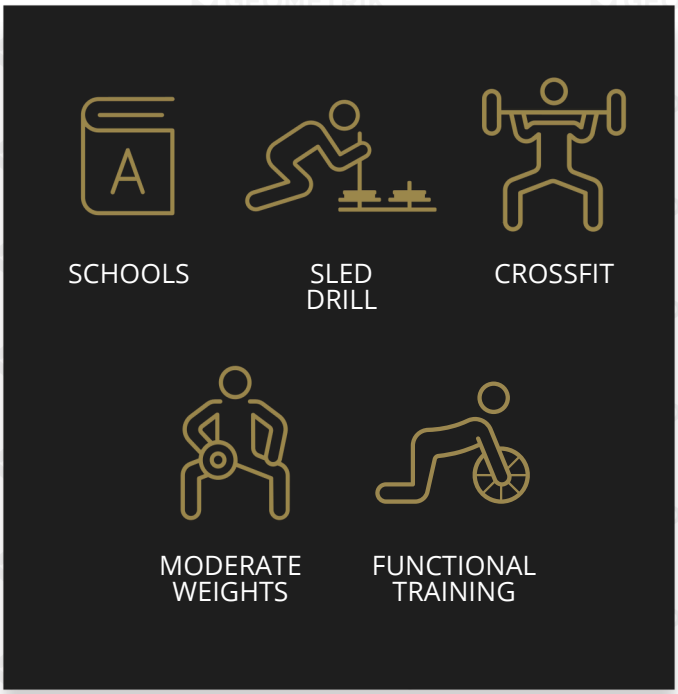

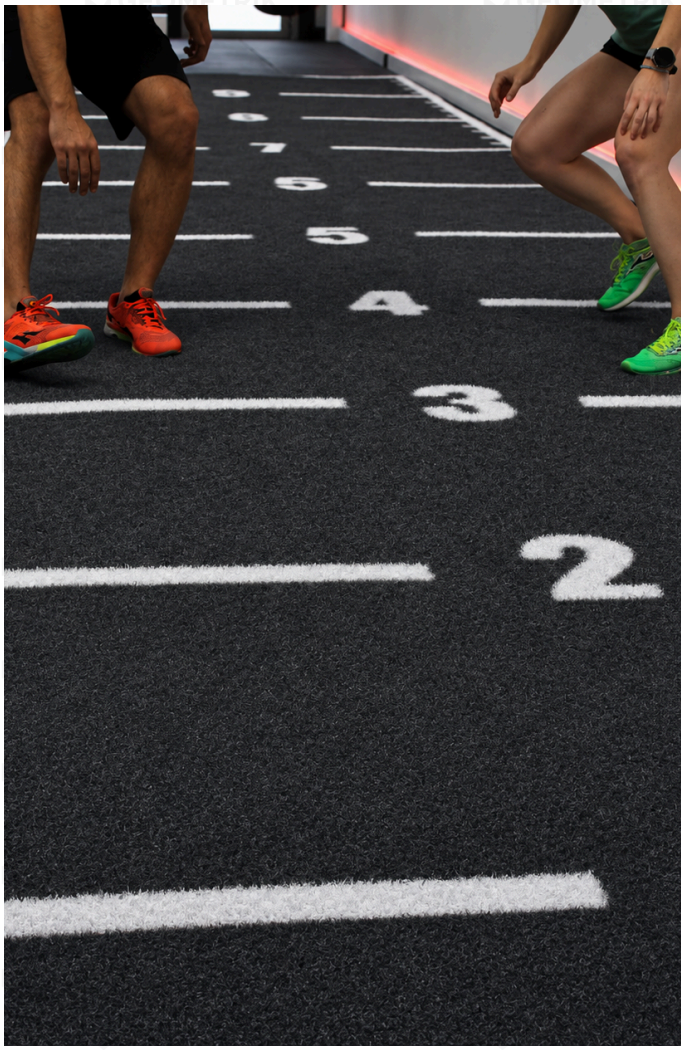

FINISHING



Curly artificial grass

DIMENSIONS AND TOLERANCES

Thickness (mm)	10mm
Length - Roll (m)	10m
Width - Roll (m)	1m | 2m
Tolerances	Length & Width ± 1.5% | Thickness ± 5%

Head Office: Rua dos Carvalhais, nº 320, **3885-033, Arada - Ovar**

Office: Rua Família Malaquias, Lote 2, **3880-327 Ovar**

www.geometriktarget.com
Tel: (+351) 256 333 180
info@geometriktarget.com

CurledLadder

TECHNICAL DATA SHEET

COMPOSITION

Yarn Type	7500Dtex 100% PE with UV stabilization	
Gauge	3/16”	
Yarn Height	15mm (+/-5%)	
Stitch rate	300s/m (63000/m²)	
Primary backing	100% Polypropylene fabric	
Secondary backing	Styrene Butadiene Rubber (SBR)	
Fire Behaviour	Efl	EN 13501
Colors Illustrative swatches	 Black / White  Green / White	

Notes: The yarn is 15 mm high. Because it is curled, the turf has a total thickness of 10 mm.

Its composition and appearance can change, while maintaining its behavior and performance.

Head Office: Rua dos Carvalhais, nº 320, **3885-033, Arada - Ovar**

Office: Rua Família Malaquias, Lote 2, **3880-327 Ovar**

www.geometriktarget.com
Tel: (+351) 256 333 180
info@geometriktarget.com